




GeoTierre

Protecting the source of life

Newair Tape


Components for water and wastewater treatment

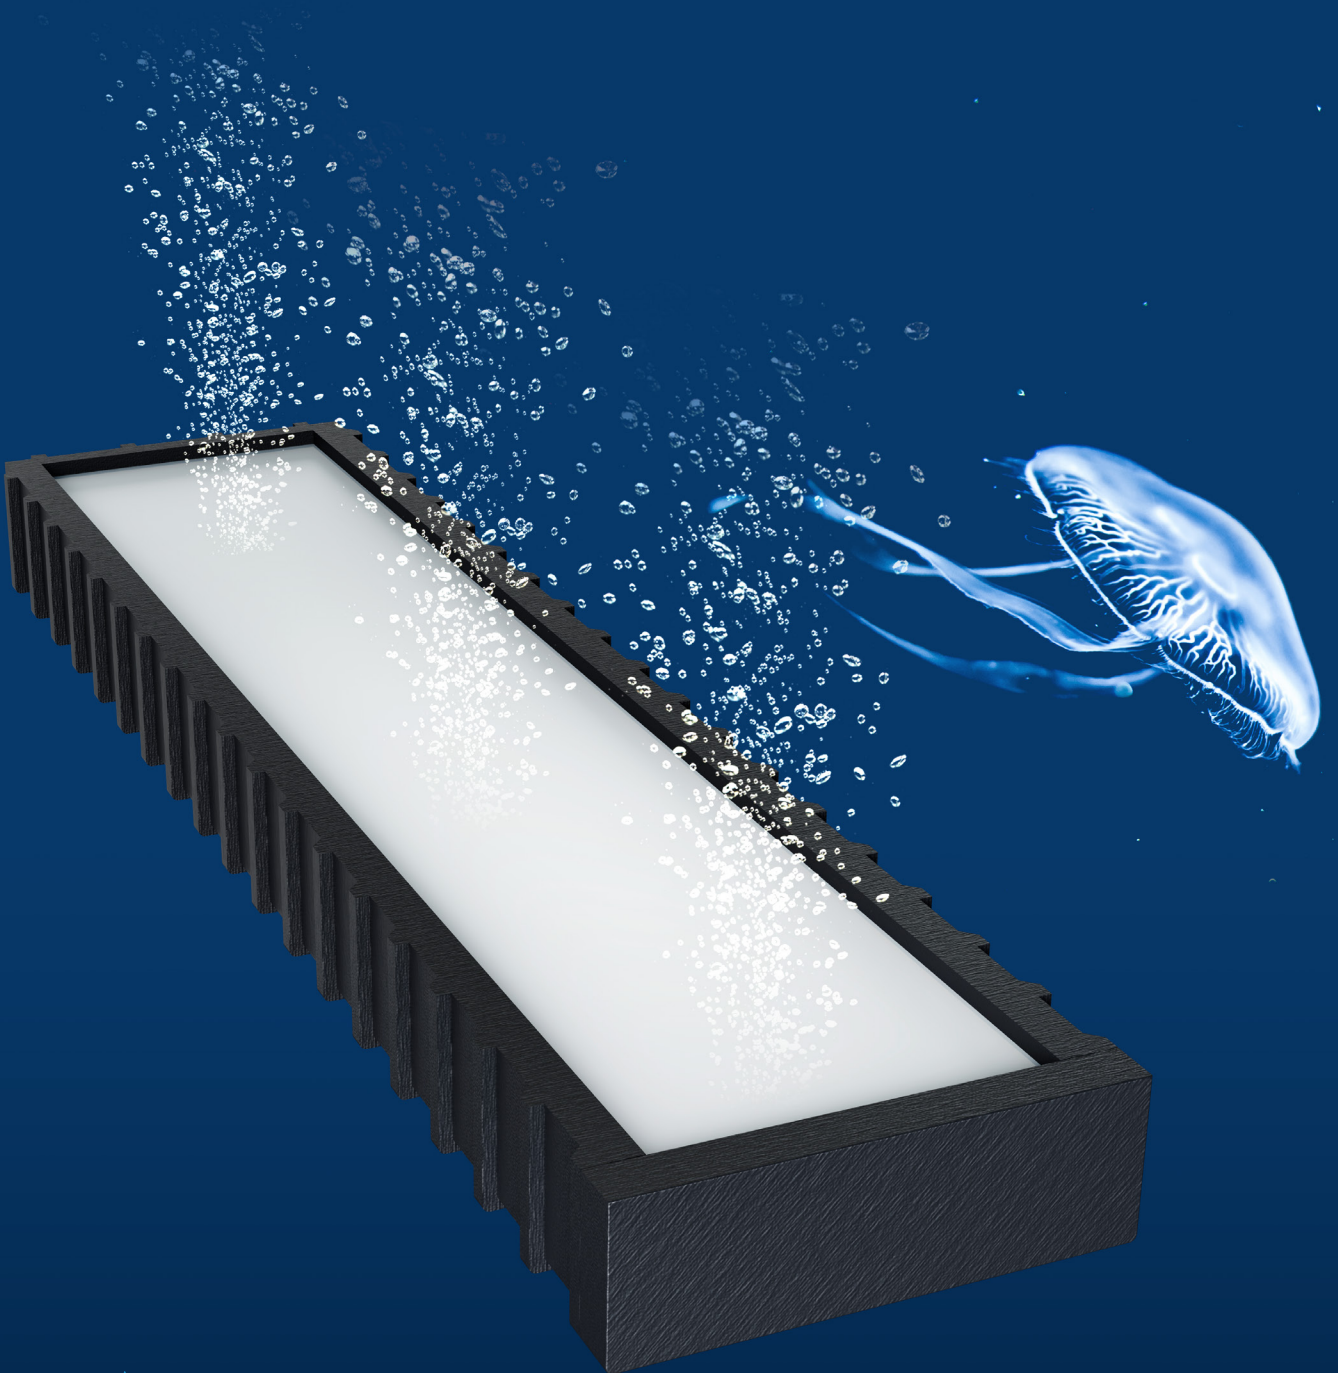

Newair Tape

PRODUCT PROPERTIES

- Dimension: 100 x 500/100/1500 mm
(width x available length)
- Various connections are available
- Air flow: - min 4 Nmc/h
- max 36 Nmc/h
- Perforated area: 0,05/0,1/0,15 m²

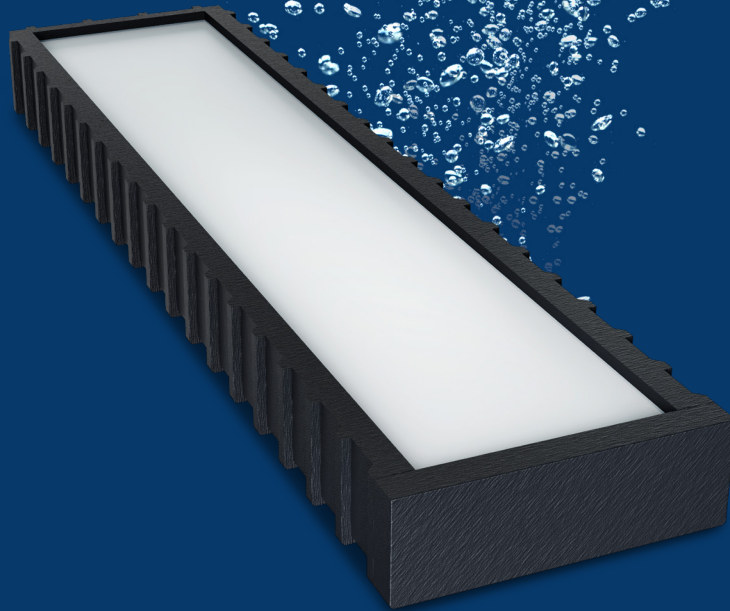



NEWAIR TAPE, OPERATING RANGE

Model	Pore size μm	Range flow rate (Nm ³ /h) min-max	Optimal flow rate (Nm ³ /h)	Perforated area in m ²	Standard connection	Max temperature Celsius/ Fahrenheit	Operating
Newair Tape 500	fine	4-12	7	0,05	1" M	80°C / 176°F	continous / intermittent
Newair Tape 1000	fine	8-24	14	0,1	1" M	80°C / 176°F	continous / intermittent
Newair Tape 1500	fine	10-36	21	0,15	1" M	80°C / 176°F	continous / intermittent

DIMENSION

Model	Width (mm)	Length (mm)
Newair Tape 500	100	500
Newair Tape 1000	100	1000
Newair Tape 1500	100	1500



Since 1983 your partner for wastewater treatment products.
Proudly Made in Italy.



CONTACT

Geoteck-Tierre S.R.L.

Phone +39 035 810296

TeleFax + 39 035 810296

email: info@geotierre.com

Via Prato Pieve 54, 24060 Casazza (BG) - ITALY

Certified ISO9001:2015

Geoteck-Tierre SRL
Via Prato Pieve 54
24060 Casazza (BG)
Italy



Azienda con sistema
di gestione qualità
certificato secondo la
Norma ISO9001:2015

Italia

geotierre.com