

# Ecoflex® Plate Silicone/EPDM


Components for water and wastewater treatment




# Ecoflex® Plate

## PRODUCT PROPERTIES

- Dimension: 500 x 250 mm
- Various connections are available
- Air flow: - min 6 Nmc/h  
- max 24 Nmc/h
- Perforated area: 0,12 m<sup>2</sup>

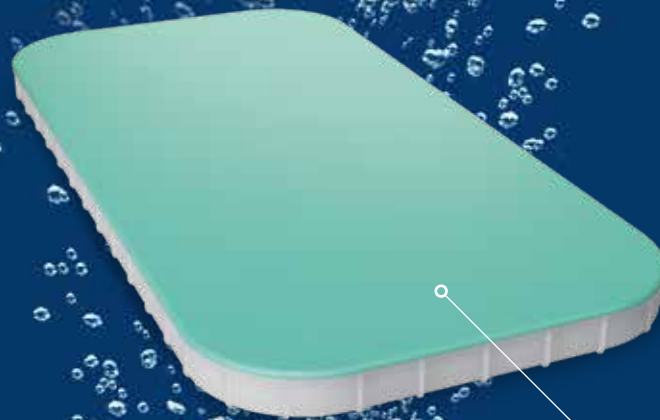

SILICONE

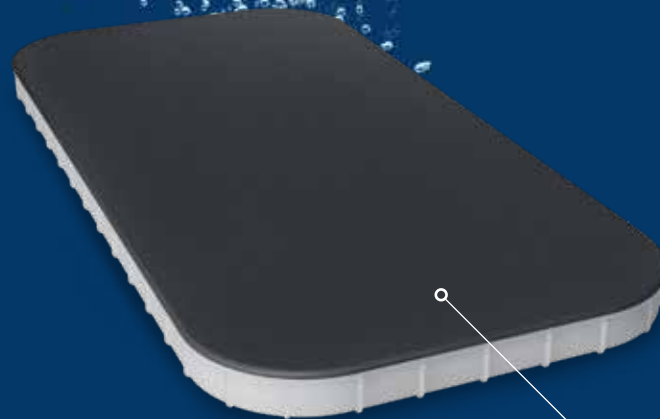

EPDM



## ECOFLEX® PLATE SILICONE, OPERATING RANGE

Model	Pore size $\mu\text{m}$	Range flow rate (Nm <sup>3</sup> /h) min-max	Optimal flow rate (Nm <sup>3</sup> /h)	Perforated area in m <sup>2</sup>	Standard connection	Max temperature Celsius/ Fahrenheit	Operating
ECOPLATE50S	60	6-24	12	0,12	1" M	230°C / 446°F	continous / intermittent
ECOPLATE100S	100	8-28	16	0,12	1" M	230°C / 446°F	continous / intermittent
ECOPLATE150S	150	10-32	20	0,12	1" M	230°C / 446°F	continous / intermittent



## ECOFLEX® PLATE EPDM, OPERATING RANGE

Model	Pore size $\mu\text{m}$	Range flow rate (Nm <sup>3</sup> /h) min-max	Optimal flow rate (Nm <sup>3</sup> /h)	Perforated area in m <sup>2</sup>	Standard connection	Max temperature Celsius/ Fahrenheit	Operating
ECOPLATE50D	60	6-24	12	0,12	1" M	130°C / 266°F	continous / intermittent
ECOPLATE100D	100	8-28	16	0,12	1" M	130°C / 266°F	continous / intermittent
ECOPLATE150D	150	10-32	20	0,12	1" M	130°C / 266°F	continous / intermittent



Since 1983 your partner for wastewater treatment products.  
Proudly Made in Italy.



## CONTACT

**Geotek-Tierre S.R.L.**

Phone +39 035 810296

TeleFax + 39 035 810296

email: [info@geotierre.com](mailto:info@geotierre.com)

Via Prato Pieve 54, 24060 Casazza (BG) - ITALY

Certified ISO9001:2015

**Geotek-Tierre SRL**  
Via Prato Pieve 54  
24060 Casazza (BG)  
Italy



Azienda con sistema  
di gestione qualità  
certificato secondo la  
Norma ISO9001:2015

Italia

[geotierre.com](http://geotierre.com)